



Rieco-Titan Products, Inc.

965 Lambrecht Road ♦ Frankfort, IL 60423
(815)464-7400 ♦ Fax(815)469-4705
email:riecotitan@att.net
www.riecotitan.com


INSTRUCTIONS FOR USING THE STABLE STIX CAMPER SUPPORT SYSTEM

The Stable Stix Camper Support System was designed to provide extra support in the front of the camper at the overhang portion. It's design is very simple and straight forward, as is the way it is set up and used.

The diagram below illustrates the way it is set up. Once the camper is on the ground in the position desired, the following procedure should be followed to achieve the optimum benefit:

1. Position each support assembly to the overhanging portion of the camper at the point where the flat begins as shown below. Foam cushion will protect the corner from damage.
2. Adjust the length of the support so that it is approximately 10 to 15 degrees from the vertical on each side of the camper, as shown. Pin it in place with the locking pin. (See fig. 1)
3. Hook the short ratchet strap upward onto the support base on each support leg, and tighten until the support legs are snug and holding the weight of the camper overhang. Be especially careful to not overtighten the ratchet strap, as that could cause damage to the camper corners. (See Figure 2 for more detailed information)

Figure 1 -STABLE STIX INSTALLATION DIAGRAM

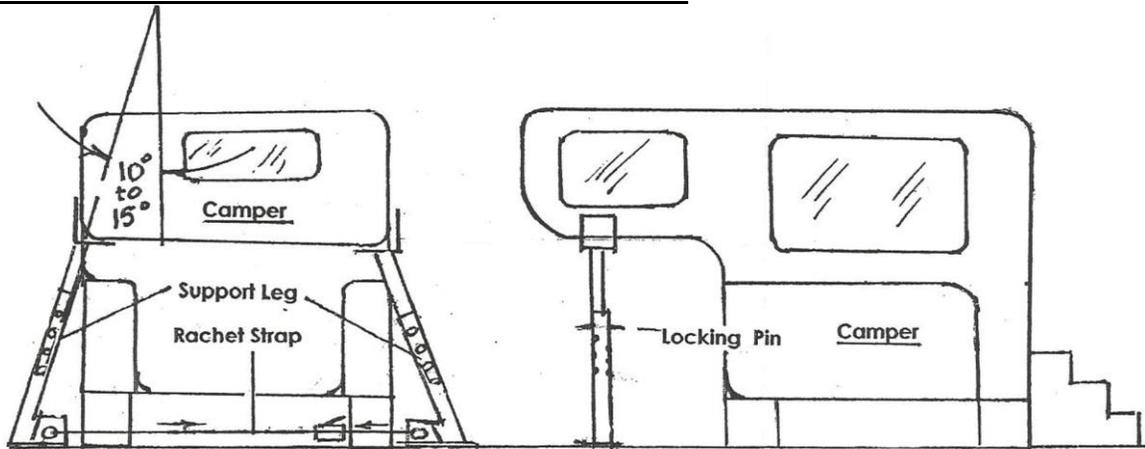

Rev. 3-7-13

4. In performing step 3, thread the strap up through the slotted ratchet drum and pull the strap to get the slack out; then ratchet the strap until the support legs are snug and firmly supporting the overhang. Do not over-tighten the ratchet, as that could cause damage to the camper.

Figure 2.- RATCHET STRAP ASSEMBLY DIAGRAM

